



## FIRE RATED DOOR EDGE GUARDS

Outstanding wear and damage protection

### PROVEN FIRE PERFORMANCE

Fitted with intumescent fire and smoke seals which are vandal-resistant yet easy to replace, these profiles are ideal for maintaining fire integrity and can be used on the front and back edges of fire resisting doorsets.

### STYLISH & DURABLE

PVC-u option features a PVC-u sheath on a timber substrate for outstanding performance and aesthetics, these elegant profiles can withstand a mechanical sharp edge impact of 60kg at 5 m/sec.

### VERSATILE IN USE

Rounded profiles are intended for meeting stiles on double doors and back edges of double swing pivot doors. Square profiles are designed for single doors or on double doors where there is the need to cut around locks and hinges.


### BENEFITS

- Fire tested to BS476: Part 20 & 22 for 30 & 60 minutes
- PVC-u option tested to withstand mechanical sharp edge of 60kg at 5 m/sec
- Reduces maintenance costs
- Differentiates door edge for DDA compliance
- A viable long-term solution to combat high and medium impact stress

### COLOURS & FINISHES

Standard finish is Satin Anodised Aluminium (SAA), other anodised finishes or colour coating available. Profiles can be supplied with either neoprene blade or blank intumescent as opposed to brush seal if preferred.

PVC-u option available in a choice of smooth or textured finishes in a wide range of colours.

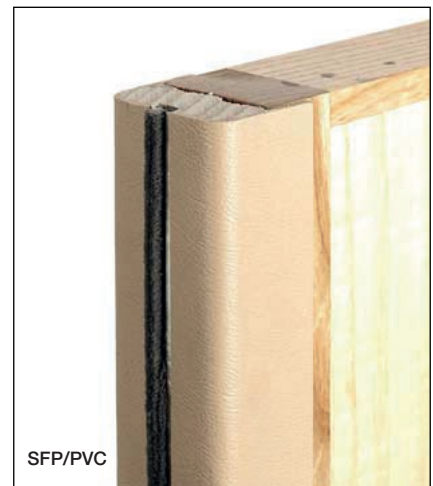

Order Code	Description	Length (mm)	Width (mm)
SRPA44	Rounded Protector Profile	2100	44
SRPA55	Rounded Protector Profile	2100	55
SFPB44	Flat Protector Profile	2100	44
SFPB55	Flat Protector Profile	2100	55

