

Seals for Windows & Doors





AQUAMAC™ 124

Weatherseal for wood doors

When fitted in four cut lengths it is important to create tight mitre joints to ensure high levels of windows performance. Joints can be enhanced by the application of a small amount of silicone mastic. To suit seal gap 5-8mm.

Packaging 125m coils, 2 to a box.
Also available per metre.
Colours: white, brown and black


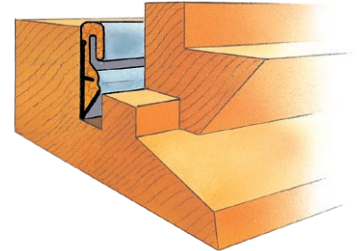
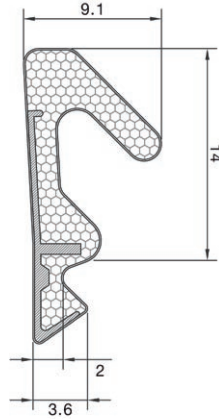


AQUAMAC™ 48

Weatherseal for wood windows

Seal Gap 2.0mm MIN to 3.0mm MAX
Kerf Slot Width. 2.7mm NOMINAL
Minimum Kerf Slot Depth 5.5mm

Packaging 350m/coil, 2 to a box.
Also available per metre.
Colours: white, brown and black






AQUAMAC™ 63

Weatherseal for wood windows

Seal Gap 3.4mm MIN to 5.4mm MAX
Kerf Slot Width. 2.7mm NOMINAL
Minimum Kerf Slot Depth 5.5mm

Packaging 300m coils, 2 to a box.
Also available per metre.
Colours: white, brown and black



AQUAMAC™ 109

Weatherseal for wood windows, specifically sliding sash parting bead

Seal Gap 3.5mm MIN to 5.5mm MAX
Kerf Slot Width. 2.7mm NOMINAL
Minimum Kerf Slot Depth 5.5mm

Packaging 250m coils, 2 to a box.
Also available per metre.
Colours: white, brown and black

