

Seals for Windows & Doors



INSTAFIT & FLIPEX WIPER SEALS

Instafit - The original patented cranked blade wiper Seal & Flipex - Ideal for pivot applications

INSTAFIT

Minimal resistance to opening or closing, operates out of sight. Weather energised - the harder it blows the tighter it seals. Reactivated with each use - never takes a set.

The superb door frame seal, ideal for hinged, pivot, side or top hung windows. Outward opening:- groove into sash or door, inward opening:- groove into frame as illustrated.

Material

Material Soft 55 Shore Polymer.


Colours

Colours Black (JSIF/BL)
Brown (JSIF/BN) and White (JSIF/W)

Packed

Packed 150 metres.

Also the perfect seal for top, bottom and centre rails of sliding sash windows, it is 'weather energised'.

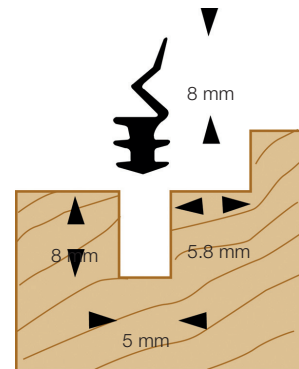

Instafit

FLIPEX



Flipex - ideal for pivot windows

Material

Soft EPDM 55 Shore.

Colours

Black (FPX/BL)
Packed 150 Metres.

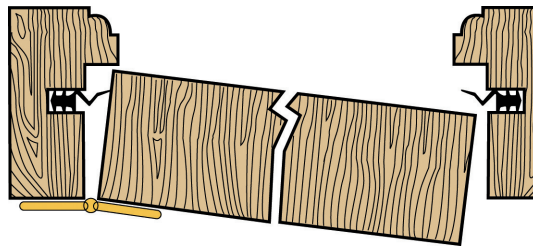

Flipex

DOUBLE SIDED PVC SECURITY GLAZING TAPE

Double sided self adhesive high tack closed cell PVC internal security glazing tape to BS7950

General Characteristics	Value	Standards	
Density	220/250kg/m3		
Tensile Strength	0.35 Mps min	DIN 53571	
Elongation	150% min	DIN 53571	
Tear Strength	2kg/cm min	DIN 53515	
Compression Set	10% max 90% - 98% recovery	DIN 53572	
Water Absorbption	8% by volume		
Cold Flexure	-30 C pass	6mm madril	
Temperature Resistance	-50 C to +60 C	BS 2571	
Shore Hardness	55 - 75	Shore 00	
Resistance to Chemicals		Ref/ Size	Colours
Acid	Good	SDG 1mm x 9mm x 50 m	Black
Mineral Oil	Good	SDG 1.5mm x 9mm x 40 m	Black/White
Alcohol	Good	SDG 2mm x 9mm x 33 m	Black/White
Alkalis	Good	SDG 3mm x 9mm x 25 m	Black/Brown/White
Petrol	Good	SDG 4mm x 9mm x 20 m	Black
Soap and Detergents	Good	SDG 5mm x 9mm x 15 m	Black
Compression required to achieve a positive waterseal: 20%		SDG 6mm x 9mm x 15m	Black

NOTE: We can supply any width in 1.5mm, 2mm & 3mm thickness of double sided security dry glazing tape